

VS1204T / VS1208T

4/8-Port A/V Over Cat 5 Splitter


- The VS1204T / VS1208T A/V Over Cat 5 Splitter is a splitter designed to connect one source to 4 or 8 displays over a long distance. Incorporating suggested compatible receivers*, the VS1204T / VS1208T A/V Over Cat 5 Splitter can be a complete solution ideal for any professional A/V installation that requires multimedia content to be delivered to multiple destinations located up to 300 m away from the source.

* Suggested Compatible Receiver Units:
 VE170R A/V Over Cat 5 Receiver
 VE170RQ A/V Over Cat 5 Receiver with Deskew
 VE172R A/V Over Cat 5 Receiver with Cascade



Features

- One audio/video input to 4/8 audio/video outputs via Cat 5e cable
- Supports local display + 4/8 remote displays
- Supports up to 225 MHz bandwidth
- Uses Cat 5e cable to extend displays up to 300 m
- Superior video quality – up to 1920 x 1200@60Hz
- Audio enabled (mono)
- Built-in 8KV/15KV ESD protection
- Rack-mountable

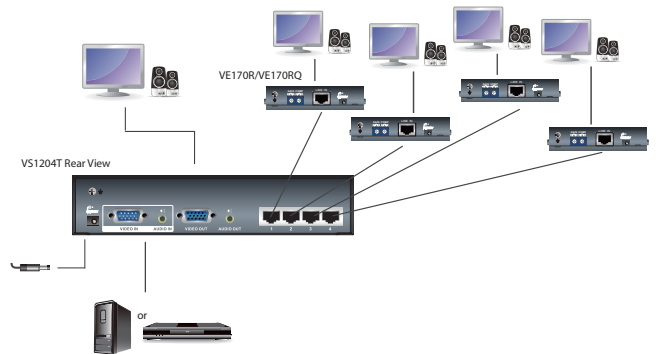

Specification

Function		VS1204T	VS1208T
Connectors	Video In	1 x HDB-15 Male (Blue)	
	Video Out	1 x HDB-15 Female (Blue)	
	Audio In	1 x Mini Audio Jack Female (Green)	
	Audio Out	1 x Mini Audio Jack Female (Green)	
	Unit to Unit	4 x RJ-45 Female	8 x RJ-45 Female
Power	1 x DC Jack		
LEDs	Power	1 (Green)	
Video		1920x1200 @ 60Hz	
Cable Distance		300 m	
Power Consumption		DC5.3V, 1.33 W	DC5.3V, 1.64 W
Environment	Operating Temp.	0–50°C	
	Storage Temp.	-20–60°C	
	Humidity	0–80% RH, Non-condensing	
Physical Properties	Housing	Metal	
	Weight	0.59 kg	0.64 kg
	Dimensions (L x W x H)	20.00 x 7.51 x 4.20 cm	20.00 x 7.51 x 4.20 cm

* Product specifications and appearance are subject to change without notice.

